

A RANGE OF ATTACHMENTS

TO PERFORM VARIED APPLICATIONS

ROCK BREAKERS



CLAMSHELL



ORANGE PEEL GRAB



ROTATING CRUSHER



QUICK COUPLER



SHEAR



MAGNET



EXTENSIVE RANGE OF APPLICATION SOLUTIONS

CONTENTS

Application	Products	Products	Page No.
Infrastructure Development	Rock Breakers	Rock Breakers	4
	Super Long Front	Quick Coupler	8
	Rotating Crushers	Super Long Front	9
	Plate Compactor	Clamshell Bucket	10
	Amphibious Excavator	Rotating Crushers	11
Demolition / Crushing	Sorting Grapple / Rake	Shear	12
	High Reach	Sorting Grapple / Rake	13
	Demolition Attachment	Orange Peel Grapple	14
	Rock Breakers	Wood Grapple	15
	Rotating Crushers	Plate Compactor	15
Mining	Sorting Grapple / Rake	Magnet	16
	Magnet Attachment	Amphibious Excavator	17
	Shear	Tunnel Excavator	18
Urban Development	Mining Rock Breakers		
	Rock Breakers		
	Super Long Front		
	Rotating Crushers		
	Sorting Grapple / Rake		
Inland Waterway Developments	Orange Peel Grapple		
	Plate Compactor		
	Clamshell Bucket		
	Shear		
	Amphibious Excavator		
Irrigation - Canal Excavation	Super Long Front		
	Amphibious Excavator		
	Rock Breakers		
Metal Recycling / Material Handling	Super Long Front		
	Plate Compactor		
	Shear		
	Magnet Attachment		
Forestry	Orange Peel Grapple		
	Clamshell Bucket		
	Sorting Grapple / Rake		
Tunnelling	Wood Grapple		
	Rock Breakers		
Others	Tunnel Excavator		
	Quick Coupler		

TATA HITACHI APPLICATION PRODUCTS & ATTACHMENTS

Extensive range of customized attachments that meet the demands of specific industry applications. These include Urban Development, Inland Waterways, Irrigation, Demolition/ Crushing, Material Handling, Metal Recycling, Mining, Tunnelling and many more.



ROCK BREAKERS ALICON SERIES

ALICON FEATURES

- New Alicon series becomes lighter, stronger, and more powerful than ever.
- Anti-blank firing system provides higher durability.
- 2-stroke selector enables selection of stroke based on application.
- Bending design of the bracket makes the breaker more durable and less noisy.
- Wide range of product lines which fit into any kind of working condition.
- Choice of optional features: TPC system, internal relief valve, BPM adjust valve, provision hole for underwater works and Auto-Grease System.

SPECIFICATIONS

Breaker Model	Unit	B30	B60 Super	B70	B140
Excavator Weight Class ¹⁾	Ton	2-4	4-8	6-8	10-15
Operating Weight ²⁾	kg	180	375	431	929
Oil Flow	lpm	25-45	35-70	45-80	90-110
Operating Pressure	Bar	80-120	100-140	100-140	120-160
Impact Blow Rate	BPM (High speed)	600-1100	350-800 (450-1000)	350-850 (450-1100)	350-550 (500-750)
Overall Length (w/STD.MTG.BKT)	mm	1334	1635	1805	2225
Chisel Diameter	mm	53	75	78	105
Chisel Length	mm	570	780	806	975
Tata Hitachi Suitable Excavator	Model	TMX20/Zx20U Zx33U	TH86/ TH86 Max	Ex70 Super+	Ex130 Super+/ Zx140

CHOICE OF OPTIONS

Underwater Works		—	—	●
Auto-Greasing System Hole		—	●	●
TPC ³⁾ System Selector Type		—	●	●
ABF(Anti-Blank Firing) System		—	●	●
Auto-Greasing Unit		—	●	●
Central Grease Supply Unit		—	●	●
BPM Adjuster		—	—	—
Internal Relief Valve		—	—	—
TPC System Remote Control Type		—	—	—
Low-Noise Housing Bracket		●	●	●

APPLICATION



MINING & QUARRYING
• Primary Breaking
• Secondary Breaking



METALLURGICAL INDUSTRY
• Slag Recycling
• Cleaning & Detricking



DEMOLITION & RENOVATION
• Masonry Structures
• Concrete Structures
• Composite Steel
• Pavements – Asphalt, Concrete



CONSTRUCTION
• Earthwork
• Trenching
• Ground excavation
• Tunneling
• Foundation work
• Building construction



B210	B230	B360	B450	B650	B850
18-25	18-25	28-40	38-50	42-81	55 - 100
1738	1777	2937	3713	4380	5625
110-160	130-170	180-250	200-280	280-400	320 - 450
130-170	130-180	140-180	140-180	150-190	150-190
350-500 (450-600)	250-400 (350-500)	200-350 (300-480)	200-300 (300-450)	250-420 (300-500)	200 - 350 (250 - 400)
2764	2764	3200	3595	3766	4059
135	140	155	165	180	200
1250	1250	1400	1650	1500	1700
Ex200 Super+ / Ex210 Super+/Zx220LC	Ex200 Super+ / Ex210 Super+/Zx220LC	Zx370	Zx470	Zx470/Zx650	Zx650/Zx870

● Standard ■ Option — N/A

●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●
●	●	●	●	●	●

1) Standard weight of carrier.

2) Standard weight hydraulic breaker with MTG-BKT and chisel.

3) Total power control.

4) Above specifications are subject to change without prior notice for product improvements.

NEW ALICON SUPER+

IMPROVED DURABILITY

- **Longer Piston & Damper** ensures better Anti-Blank Firing protection. ABF function helps to protect internal components.
- **Larger Through Bolt** protects against bolt breakage and extends component life.
- **Modified Front Cover:** Enhanced durability due to the larger diameter and integrated greasing port.

HIGHER PERFORMANCE

- **Enhanced Productivity** due to higher impact energy.
- **Larger Head Cap** containing more N₂ gas which helps to create higher impact energy.
- **Larger Chisel & Front Head** Improves front head life and the product performance.

Shape of Chisel

Classification	Major Contents	
Molt		Concrete, Rocks, Pavements, Slopes
Wedge		Trench, Slopes, Finishing
Blunt		Quarries
Conical		Concrete, Rocks, Pavements



SPECIFICATIONS

Description	Unit	B145 Super+	B215 Super+	B235 Super+
Suitable Excavator	ton	10-15	18-25	18-25
Max. Hydraulic Input Power	kW	32.5	40	50
Control Valve Type	-	External Type	External Type	External Type
Operating Weight	kg	959	1,817	1,856
Overall Length	mm	2,263	2,841	2,841
Chisel Out Diameter	mm	105	135	140
Chisel Length	mm	975	1,300	1,300
Setting Pressure	bar	190	210	210
Working Pressure	bar	120-160	130-170	130-180
Oil Flow	L/min	90-110	110-160	130-170
Blow Rate (Long Stroke)	BPM	350-550	350-500	250-400
Back Head N2 Gas Pressure	Bar	13	12	13
Adjustable BPM Valve	-	Available	Available	Available
Tata Hitachi Suitable Excavator	Model	Ex130 Super+ / Zx140	Ex200 Super+ / Ex210 Super+ / Zx220LC	Ex200 Super+ / Ex210 Super+ / Zx220LC

ROCK BREAKER

POWERFUL & RELIABLE LINE-UP DESIGNED AND MANUFACTURED IN JAPAN

FEATURES

- Excellent power-to-weight ratio.
- High-impact energy provides greater productivity.
- Unique gas charged piston gives high impact energy with less recoil.
- Quick-change chisel replacement makes it easy & reduces down-time.
- Replaceable cylinder sleeve for easy and economical rebuild.
- Simple two-moving-parts design for greater reliability.



SPECIFICATIONS

Breaker Model	Unit	GH-6	GH-9	GH-10	GH-15	GH-18	GH-30	GH-40	GH-50
Excavator Weight Class ¹⁾	Ton	10-16	19-21	19-21	29-38	39-50	60-80	90-110	100-120
Operating Weight ²⁾	kg	950	1590	1810	2895	3430	5470	7750	11300
Oil Flow	lpm	90-150	150-200	165-210	200-250	220-290	280-350	300-400	350-450
Operating Pressure	Bar	165	180	150-180	150-170	150-170	160-180	160-180	150-180
Impact Blow Rate	BPM	450-800	500-650	430-550	350-450	300-400	310-390	240-330	210-280
Chisel Diameter	mm	106	126	136	156	165	184	204	214

CHOICE OF OPTIONS

Underwater Works		●	●	●
Auto-Greasing System Hole		●	●	●
ABF(Anti-Blank Firing) System		●	●	●
Auto-Greasing Unit		●	●	●
Low-Noise Housing Bracket		●	●	●

- 1) Standard weight of carrier.
- 2) Standard weight hydraulic breaker with adaptor and tool.

APPLICATION

 MINING & QUARRYING • Primary Breaking • Secondary Breaking	 METALLURGICAL INDUSTRY • Slag Recycling • Cleaning & Dentracking
 DEMOLITION & RENOVATION • Masonry Structures • Concrete Structures • Composite Steel • Pavements - Asphalt, Concrete	 CONSTRUCTION • Earthwork • Tranching • Ground excavation • Tunneling • Foundation work • Building construction


● Standard ● Option □ N/A

QUICK COUPLER

TWIN LOCK POWER LATCH QUICK COUPLER

FEATURES

- Quick Couplers facilitates rapid change of bucket and attachments increasing the equipment utilization and productivity.
- Fully Automatic hydraulic coupler with unique Automatic Blocking System (ABS) eliminating the need for a manually inserted safety pin.
- Strong, durable, high-tensile precision single piece cast steel frame.
- Twin-locking feature enables front and rear attachment pins mechanically locked, in the event of any hydraulic power loss.
- Attachments can only be removed in a safe, fully crowd-in position.
- Short Payback period of less than six months.

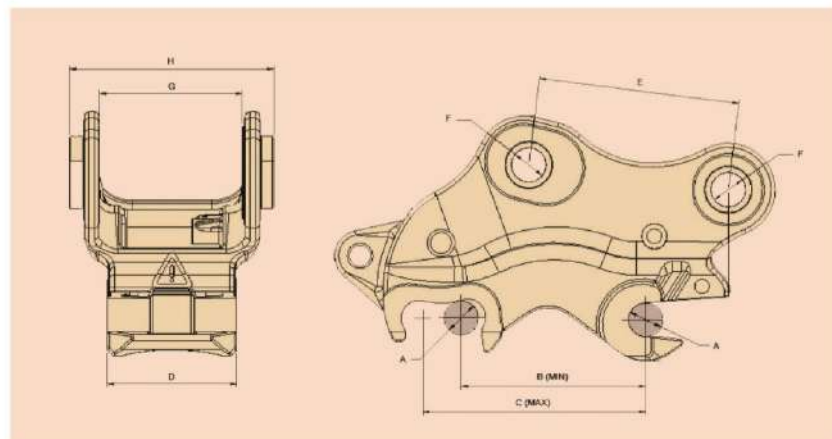

SPECIFICATIONS

COUPLER RANGE / MACHINE TONNAGE

Description	Range 4	Range 6	Range 8	Range 9	Range 11	Range 13
Excavator Weight Class	11-15 Ton	19-23 Ton	30-39 Ton	40-49 Ton	65 - 70 Ton	100 - 120 Ton
Operating Weight	180 kg	310 kg	560 kg	850 kg	1350 kg	2120 kg
Front and Rear Pin diameter (A & A')	60 & 65 mm	80 & 80 mm	90 & 100 mm	100 & 110 mm	120 & 130 mm	120 & 130 mm
Attachments pick up range (B & C)	345 - 415 mm	430 - 520 mm	482 - 602 mm	572 - 603 mm	640 - 645 mm	640 - 645 mm
Tata Hitachi Suitable Excavator Models	Ex130 Super+/ Zx140	Ex200 Super+/ Ex210 Super+/ Zx220LC	Zx370	Zx470	ZX650	EX1200


SUPER LONG FRONT

APPLICATIONS

- Desilting operations in ports, canals & lakes.
- Agriculture well rejuvenation.
- Inland waterways development.
- Urban construction work.
- Road construction & bridges.
- Miscellaneous applications such as salt pans & fly ash handling.

SCOPE OF SUPPLY

- 1x Boom with full set of hydraulic lines.
- 1x Arm with full set of hydraulic lines.
- 1x Bucket with pins and side link.
- 1x Bucket cylinder.
- 1x Boom yoke pin.
- 1 set of hydraulic hose.
- 1 set of bucket linkage.



SPECIFICATIONS

Excavator Operating Weight	Length		A Max. Reach		B Max. Depth		C Max. Height		D Boom Height		Approximate Bucket Capacity
	m	ft	m	ft	m	ft	m	ft	m	ft	m³
20 - 22 ton	14.5	47'5"	14.5	47'5"	11.05	36'2"	12.11	39'7"	2.3	7'5"	0.5
	15.5	50'8"	15.5	50'8"	11.62	38'1"	13.5	44'2"	2.5	8'2"	0.4

APPLICATION



DREDGING



EROSION CONTROL
AND PREVENTION



MAINTENANCE &
CLEANING OF RIVERS,
LAKES, SHORELINES,
PONDS, ETC





DRAINAGE /
LAND RECLAMATION
WORK IN CITIES

CLAMSHELL BUCKET

FEATURES

- Pendulum-type clam shell bucket which helps ease of operation during materials loading & unloading.
- Less operation cycle compared to normal operation.
- Rotating option: Hydraulic rotating type.
- Dual Cylinder: Dual hydraulic cylinder for excellent digging force.
- Optimal bowl radius for highest fill factor.
- Choice of option: Tooth points.

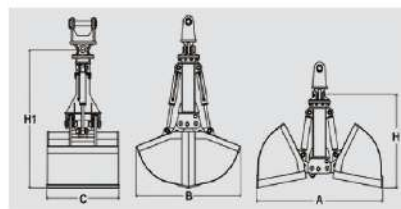

SPECIFICATIONS

Description	Operating Weight	Capacity	A	B	C	H	H1	Recommended Carrier
Unit	kg	Cum	mm	mm	mm	mm	mm	Ton
DMCB1000	1250	1	2027	1837	1100	1930	2635	18-25

APPLICATION



MATERIAL HANDLING

- Industrial wastes, grains, sands, etc.




LOADING AND UNLOADING

- Coal, iron ore, gravel, clinker from railway wagon and barge.

ROTATING CRUSHER

FEATURES

- 360° workable direction.
- Workable on narrow building spaces or noise-regulated environment.
- Speed-up valve accelerates work speed. (Optional)
- Moving arm tooth replaceable as standard.
- Welding-tooth type and bolting-tooth type available.

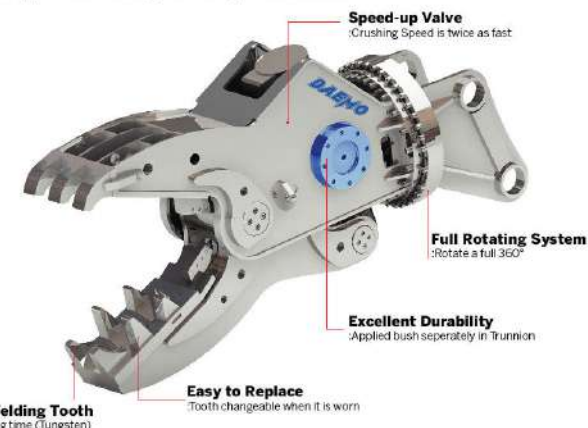

SPECIFICATIONS

Description	Unit	DMC230R	DMC230RB	DMC330R	DMC330RB
Operating Weight	kg	2,250	2,300	3,050	3,100
Maximum Opening Width	mm	780	780	890	890
Overall Length	mm	2,500	2,480	2,660	2,685
Crushing Force (End)	ton	57	57	73	73
Operating Pressure	kgf/cm ²	320	320	320	320
Oil Flow Rate	lpm	200-250	200-250	250-300	250-300
Excavator Class	ton	20-28	20-28	27-38	27-38

APPLICATION



STEEL STRUCTURES

- Cutting Steel Profiles
- Cutting Steel Girders/Beams
- Cutting Reinforcement



REINFORCED CONCRETE

- Primary Demolition
- Secondary Demolition



NON-REINFORCED CONCRETE

- Primary Demolition
- Wall Elements
- Secondary Demolition



LIGHT DEMOLITION

- Light Structure
- Masonry
- Beams
- Inside Renovation

SHEAR

FEATURES

- 360° workable direction.
- H-beam and I-beam can be cut in a single cut.
- Easier cutter replacement.
- Speed-up valve accelerates work speed.
- Speed-up valve as standard for DMS400, DMS550X, DMS700.



SPECIFICATIONS

Description		Unit	None Guide Block Type		Demolition	Guide Block Type			
			DMS250	DMS300		DMS360	DMS400	DMS550X	DMS700
Operating Weight		kg	2,200	2,920	2,790	3,450	5,300	6,800	7,900
Max. Opening Width		mm	668	570	806	456	710	802	896
Overall Length		mm	2,353	2,410	2,588	2,690	4,625	5,050	5,480
Cutting Force (Max)		ton	259	370	347	495	1,150	1,500	1,750
Operating Pressure		kgf/cm ²	320	320	320	320	340	340	340
Oil Flow Rate		lpm	200~250	250~300	250~300	290~320	200~320	250~320	320~
Excavator Class		ton	22~27	27~33	27~33	33~45	25~ (2nd) 41~ (3rd)	36~ (2nd) 50~ (3rd)	42~ (2nd) 73~ (3rd)
Cutting Capability	H-Beam	mm	150×150	200×200	200×200	300×300	350×350	380×380	450×450
	I-Beam		200×125	300×150	300×150	350×150	400×175	600×190	600×190
	Solid Round		40	50	50	60	70	80	90
	Channel Plate		250×90×13	380×100×16	380×100×16	425×100×10	425×100×10	425×100×10	425×100×10
Angle Plate			100×100×10	150×150×15	150×150×15	200×200×20	200×200×25	250×250×25	250×250×30

APPLICATION



METAL
RECYCLING



STEEL
MILLS



INDUSTRIAL
DEMOLITION



SHIP
DEMOLITION

SORTING GRAPPLE/RAKE

FEATURES

- Link-type Mounting Bracket.
- Powerful performance with two cylinders.
- Rotation option type: fixed or hydraulic.
- Tooth replacement version.



SPECIFICATIONS

Description	Unit	DMR600	DMR800	DMR1000
Operating Weight	kg	970	1300	2200
Capacity	Cum	0.36	0.6	0.93
Max Clamping Force	ton	3.7	5	7.4
A	mm	1790	2180	2445
B	mm	1210	1356	1485
C	mm	800	1000	1100
H	mm	1216	1437	1595
H1	mm	1379	1682	1900
Recommended Carrier	ton	14~18	18~25	25~38

APPLICATION



SORTING



WASTE HANDLING



CLEANING SITES




LOADING

ORANGE PEEL GRAPPLE

FEATURES

- Loading/unloading metal scrap, wastes and garbage.
- Pendulum type.
- Rotating options: Hydraulic rotating type, free rotating type or fixed type.
- Number of tines: 4/5/6.
- Tines options: Close type, semi-close type, open type.



SPECIFICATIONS

Description	Unit	DMSG800
Operating Weight	kg	1,200
Capacity	Cum	0.7
A	mm	1,820
B	mm	1,290
H	mm	1,630
H1	mm	1,905
Recommended Carrier	ton	18-25
Standard Tines No.	ea	5

APPLICATION



SORTING



WASTE HANDLING



CLEANING SITES




LOADING

WOOD GRAPPLE

FEATURES

- Link type mounting bracket.
- Rotating type.
- Loading/unloading timbers, logs and pipes.
- Wide jaws suitable for various work requirement.
- High efficiency.



SPECIFICATIONS

Description	Unit	DMWL800
Operating Weight	kg	890
Capacity	Cum	0.55
A	mm	1700
B	mm	304
C	mm	670
H	mm	1545
H1	mm	1755
Recommended Carrier	ton	18-25

APPLICATION



WOOD SORTING



WOOD HANDLING



WOOD LOADING/UNLOADING

PLATE COMPACTOR

FEATURES

- High compaction efficiency for ground, trench and slope.
- Requires breaker piping line.
- Control block system for easy & safe setting.
- Robust design with bending structure & hub type damper.



SPECIFICATIONS

Description	Unit	DMV50	DMV140	DMV230	DMV300
Impulse Force	ton	2.3	3.7	7.5	11
Weight	kg	342	624	850	1282
Compact Area	Width	450	650	750	900
	Length	700	750	1000	1200
Oil Flow Required	lpm	30-55	90-110	130-170	180-250
Max Cycle Per Minute	rpm	2500	2500	2200	2200
Operating Pressure	bar	100-140	120-160	130-180	140-180
Excavator Class	ton	2-7	8-15	15-22	25-47

APPLICATION



ROAD CONSTRUCTION



SEWER & TRENCH CONSTRUCTION



SLOPE COMPACTION




EXTENSION FOR COMPACTION NARROW TRENCH

MAGNET

FEATURES

- High efficiency for loading/unloading metal scrap.
- Reduced cost of follow-up maintenance.
- Extended operational area.
- Choice of options: fixed, link, knuckle and grapple.

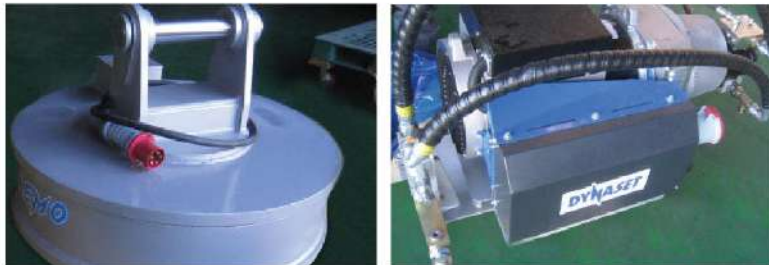

SPECIFICATIONS

Description	Unit	DMSL920	DMSL1150	DMSL1350	DMSL1550	DMSL1850
Operating Weight	kg	850	1,400	1,850	2,300	3,000
Excavator Class	ton	10-15	18-25	25-32	32-45	47-50
Magnet Diameter	Φ	920	1,150	1,350	1,550	1,850
Capacity	Iron Plate	9,000	14,000	19,000	24,000	27,000
	Lump of Iron	200	600	1,200	1,600	2,000
	Scrap	200	400	800	1,000	1,200
Electric Current	A	26	43	60	78	95

HYDRAULIC MAGNET GENERATOR SPECIFICATION

Hydraulic Generator (Max)	kW	10	15 (STD)/20 (OPTION)	20	30
Magnetic Coil Power (Max)	kW	9	14.5/19.5	19.5	29.5
Operating Voltage	VDC	220±5%			
Pressure Line	P	BSP 1/2"	BSP 3/4"	BSP 3/4"	BSP 3/4"
Return Line	R	BSP 1/2"	BSP 1"	BSP 1"	BSP 3/4"
Drain Line	D	O6L-(M12X1.5 Male)	BSP 1/4"	BSP 1/4"	M22X1.5
Flow Min	lpm	50	68 / 94	94	122
Flow Max	lpm	68	95 / 110	110	140
Pressure at Nominal Power Output	Bar	180	190	190	190
Pressure Max	Bar	210	210	210	250

APPLICATION



METAL RECYCLING



STEEL MILLS



INDUSTRIAL METAL HANDLING




METAL ITEMS LOADING/ UNLOADING

AMPHIBIOUS EXCAVATOR

FEATURES


- Amphibious excavator is specifically designed to manoeuvre in marshes, swampy areas and soft terrain, as well as to float on water.
- Patented multi-synchronous drive motors (2 motors on each pontoon) offers superior tracking on muddy and swampy terrains.
- Supplementary pontoons and spud pile boosts stability in deeper water operations to overcome buoyancy effect.
- Hydraulic extendable pontoon enables extension / retraction based on stability and transportation needs.

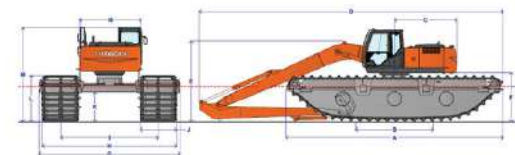

20-ton class excavator		m
A	Maximum Track Length	9.63
B	Track Length On Ground	4.15
C	Rear Upper structure Length	2.75
D	Overall Length*	14.41
E	Height Of The Boom*	3.55
F	Upperstructure Clearance	2.17
G	Overall Width (min/max)	4.80/6.28
H	Track Width (min/max)	4.47/5.95
I	Track Gauge (min/max)	2.85/4.33
J	Pontoon Width	1.62
K	Minimum Ground Clearance	1.30
L	Track Height	2.03
M	Overall Cab Height	4.13
N	Upper structure Overall Width	2.71
O	Estimated Water Level	1.55

Note:

- Based on 15 meter Long Reach Package
- Water level based on 33.5 ton operating weight
- All dimensions are approximate



APPLICATION



DREDGING



EROSION CONTROL AND PREVENTION



MAINTENANCE & CLEANING OF RIVERS, LAKES, SHORELINES, PONDS, ETC



DRAINAGE / LAND RECLAMATION WORK IN CITIES

TUNNEL EXCAVATOR

FEATURES

- For operation in tunnel construction work site, exclusively designed machine for tunnel application.
- The short tail swing design for efficient operation in tunnel.
- Attachment port available for rock breaker.



SPECIFICATIONS

Model	Unit	EX200 LC Super	EX110 Shovel
Bucket Capacity	m³	0.8	0.6
Operating Weight	kg	19500	11600
Engine power (Cummins 6BT5.9c)	PS@rpm	125@2000	76@2200
Swing speed	rpm	13.7	11.8
Travel speed	kmph	4.2	4.3
Fuel tank Capacity	L	310	250
Boom length	mm	3550	2550
A Arm length	mm	2450	2500
A* Max Digging reach	mm	7640	5560
B Max digging reach (on ground)	mm	7415	-
B* Max digging depth	mm	3280	2520
C Max digging depth (8' level)	mm	3085	-
D Max Cutting height	mm	9160	6750
E Max dumping Height	mm	6370	3290
F Min swing radius/Working radius	mm	2735	2630

APPLICATION



TUNNELING

- Road Construction
- Railways
- Irrigations canal

TATA HITACHI NETWORK

CORPORATE OFFICE

Tata Hitachi Construction Machinery Company Pvt. Ltd., Jubilee Building, 45 Museum Road, Bangalore - 560 025. Ph: 080-66953301-05, Fax: 080-66953309

SERVICE HEADQUARTERS

JAMSHEDPUR - SERVICE HEADQUARTERS
"Service Head Quarters, Adjacent to SBI Telco Campus Branch," Jamshedpur - 831 004 Ph: 0657-6690700

SPARE PARTS NETWORK

Southern Region Warehouse
Spareparts Support Center, Tata Hitachi Campus, Block No.2, KIA DB, Belur Industrial Estate, Garag Road, Mummigatti, Dharwad - 580 011 Ph: 0836-2486665; 2486667 & 2486678

CENTRAL WAREHOUSE: NAGPUR

M/s. Swetal Logistics
Tata Steel Yard, 16 KM Stone, NH-6, Bhandara Road, Mahalgaon - 441 202, Dist. Nagpur. Ph: 9881738501 & 9881738502

BRANCHES

AHMEDABAD

D-306, Ganesh Meridian, Opp: Amiraj Farm, Nr. Gujarat New High Court, Sarkhej - Gandhinagar Highway, Ahmedabad - 380 061 Ph: 079-40049800 / 01 / 02 / 09

AURANGABAD

C/o. Total Earthmovers Pvt. Ltd., Shop No. 01A, Plot No: 09, Opp: Patel lawns, Shaha nagar, Beed By-pass, Aurangabad - 431 010. Ph: 0240 - 2376066/55

BANGALORE

1/15, 3rd Floor, North Building, Silver Jubilee Block, Unity Building Complex, Mission Road, 3rd Cross, Bangalore - 560 027 Ph: 080-22210239 & 22539500

BHUBANESHWAR

C/o.Trishul Tread Pvt Ltd., Plot No.220, Sector - A, Zone B, Ground Floor, Mancheswar Industrial Estate Bhubaneswar - 751 010 Ph: 0674-2582017 / 23 Fax: 0674-2582112

CHANDIGARH

Plot no. 150, Industrial Area, Phase - II, Panchkula, Haryana - 134 113 Ph: 0172- 5020415 / 5020418 / 5020419

CHENNAI

M/s. Chennai SSSS Equipments Pvt. Ltd. No.135C, Block-II, Kavitha Towers, Velappanchavadi, Poonamallee High Road, Chennai - 600077 Ph: 9514701701, 9500035919

COCHIN

C/o. PSN Construction Equipment Pvt. Ltd., 34/126, A, NH-47, Edappally Bye Pass, Edappally P.O. Cochin - 682 024 Ph: 0484-2336375 Fax: 0484-2330712

DURGAPUR

C/o. P.S Earthmovers Pvt. Ltd., RA-78, S S B Sarani, Sector - 2B Bidhannagar, Durgapur - 713 212 (WB) Mob: 9945687614 Shirsendu Chakraborty

GOA

Shop 1 & 2, Opp. Hotel Status Residency Boleparid, Fatorda, North Goa, Goa - 403602 Ph: 0832-2741007 / 031 / 041

GUWAHATI

Dihang Arcade, 2B, 2nd Floor Opposite Dona Planet, G S Road, Guwahati - 781 005 Ph: 0361-2450060, Mob Mob: 9435591920

HUBLI

Opp. Hyundai Showroom, Plot No. 28, RS # 1A, Bharidevarakoppa Village, Hubli - 580 025 Ph: 0836-6453481 & 6453482

HYDERABAD

5-3-338/3/A, (Above J&K Bank), Rashtrapathi Road, Opp: Mahindra Automotive Showroom, Secunderabad - 500 003 Ph: 040-27538772 / 3 / 4 / 5

INDORE

C/o. Kallash Infratech Pvt. Ltd. 12, Gulab Baag, Dewas Naka, Ring Road, Opp: Metro Wholesale, Beside Hotel Satkar, Indore (MP) - 452 010 Ph: 0731-4989701 & 4989702

JABALPUR

932, Third Floor, Above Vishal Mega Mart, Opp: Chanchia Bai College, Maharashtra School Road Near Ranital Chowk, Wright Town, Jabalpur-482002 (M.P.) Ph: 0761- 4081922

JAIPUR

701, 7th Floor, Diamond Tower, Neelkanth Colony, Punani Chungi, Almer road, Jaipur - 302 021, Rajasthan Ph: 0141-6535558 / 6545559

JAMMU

C/o. Waves Tradecom Pvt. Ltd., H.No.18, Gujjar Colony, Chanai Jammu, J & K - 180 015 Ph: 9797599919 (Ridhan Langer)

JAMSHEDPUR

Branch Office:
Next to State Bank of India, Telco Campus, Jamshedpur - 831004 Ph: 7260813464. BM: Vikas Srivastava

Ranchi Area Office:

C/o. Vedant Earthmovers Shop No. G9, Block C, Mangal Tower, Lalpur Near Kanta Toll Chowk, Old HB Road, Ranchi - 834001 Ph: 7635091338 Sumit Das

Dhanbad Area Office:

Ground Floor, Raj Complex, Kosla Kusma At & PO Saraidhela, Dhanbad - 828127 Ph: 7625060284 Nitish Thakur

KOLKATA

Regional and Branch Office
PO. South Nibra, Near Anikurhati Check Post, PS - Dornjur, N.H-6 (Mumbai Road) Dist. Howrah, West Bengal - 711 409 Ph: 033-26690723 & 26, Fax: 033-26690717

LUCKNOW

1st Floor, Cyber tower, TC 34/V-2 Vibhuti Khand, Gomti Nagar, Lucknow - 226 010 Ph: 0522-4071272 / 4071273 / 4071274

MADURAI

C/o. Vetri Construction Equipment Co. 4/108-3, Kattupuli Nagar, Four Lane Road Samayanalur Bye-pass Madurai - 625402

MUMBAI

11th Floor, Sumer Plaza Marol Maroshi Road, Marol Naka, Andheri (East) Mumbai - 400 059. Ph: 022-48824200

NAGPUR

6th Floor, Block No. 502 Shriram Shyam Tower, Kingsway, S V Patel Marg, Nagpur - 440 001 Ph: 0712-6602453/6602216/6602218

NELLORE

26-II-310, 1st Floor, Jyothinagar, Beside Railway Station Road Vedayapalem, Nellore - 524 004 Ph: 0861-2317697 & 2317698

NEW DELHI

C-155, Phase -1, Okhla Industrial Area, New Delhi - 110 020 Ph: 011- 40503875

PATNA

311, 5th Floor, Adharshila Complex Beside RBL, South Gandhi Maidan Patna - 800001 Mob: 7033095903/7033091113/7033190217 & 9238003172

PUNE

Service Building, BAIF Compound, Dr. Manibhai Desai Nagar, Warje Mahwadi, Pune - 411 052 Ph: 020-25234025/26/27/28 Fax: 020-25234027

RAIPUR

202, 2nd Floor, MM Silver Plaza, Opp. Udyog Bhawan, Ring Road No. 1, New Rajendra Nagar, Raipur-492001 Ph: 0771-2413396, 4919072 & 4919073

RAJKOT

C/o. Progressive Motors Pvt Ltd., Near Rajkamal Petrol Pump, Behind Perfect Auto, Gonda Road, Rajkot - 360 004

SALEM

C/o. CAG Construction Equipment Pvt. Ltd., # 39/2, MM Brothers, Kandampatti Salem - 636 005 Ph: 0427-2225001, 2225003, 2225009

UDAIPUR

1st Floor, Plot No. 1, Hawa Magri, Sukher Main Road, Udaipur - 313 001

VIJAYAWADA

3rd Floor, H.No. 40-25-80, NH-5 Road Kurra Satyanarayana Street, Patamatalanka, Vijayawada, Krishna District - 520 010, (AP) Ph: 0866-2486381

VISHAKAPATNAM (VIZAG)

C/o. Regus Office No. 417, Level 3 & 4 Naga Chambers, Door No. 12-1-15, Plot No. 49, Opp. HDFC Bank Rama Nagar Vishakapatnam - 530002 Ph: 0891-2562114, Mob: 7675919878

MANUFACTURING FACILITIES

JAMSHEDPUR PLANT

Tata Hitachi General Office, Block 1, C/o. Tata Motors Premises, P.O.: Telco GM's Post Office, Jamshedpur - 831 010 Ph: 0657 - 6691313, 0657-6691410/403 Fax: 0657 - 2268882


DHARWAD PLANT

Block No. 2, KIA DB, Belur Industrial Estate, Garag Road, Mummigatti, Dharwad - 580 011 Ph: 0836-623501-09

KHARAGPUR PLANT

Village - Rupnarayanpur, Post Office - Jakpur Kharagpur - 721 301 Dist - Paschim Medinipur West Bengal. Ph: 03222-663266

OUR NETWORK

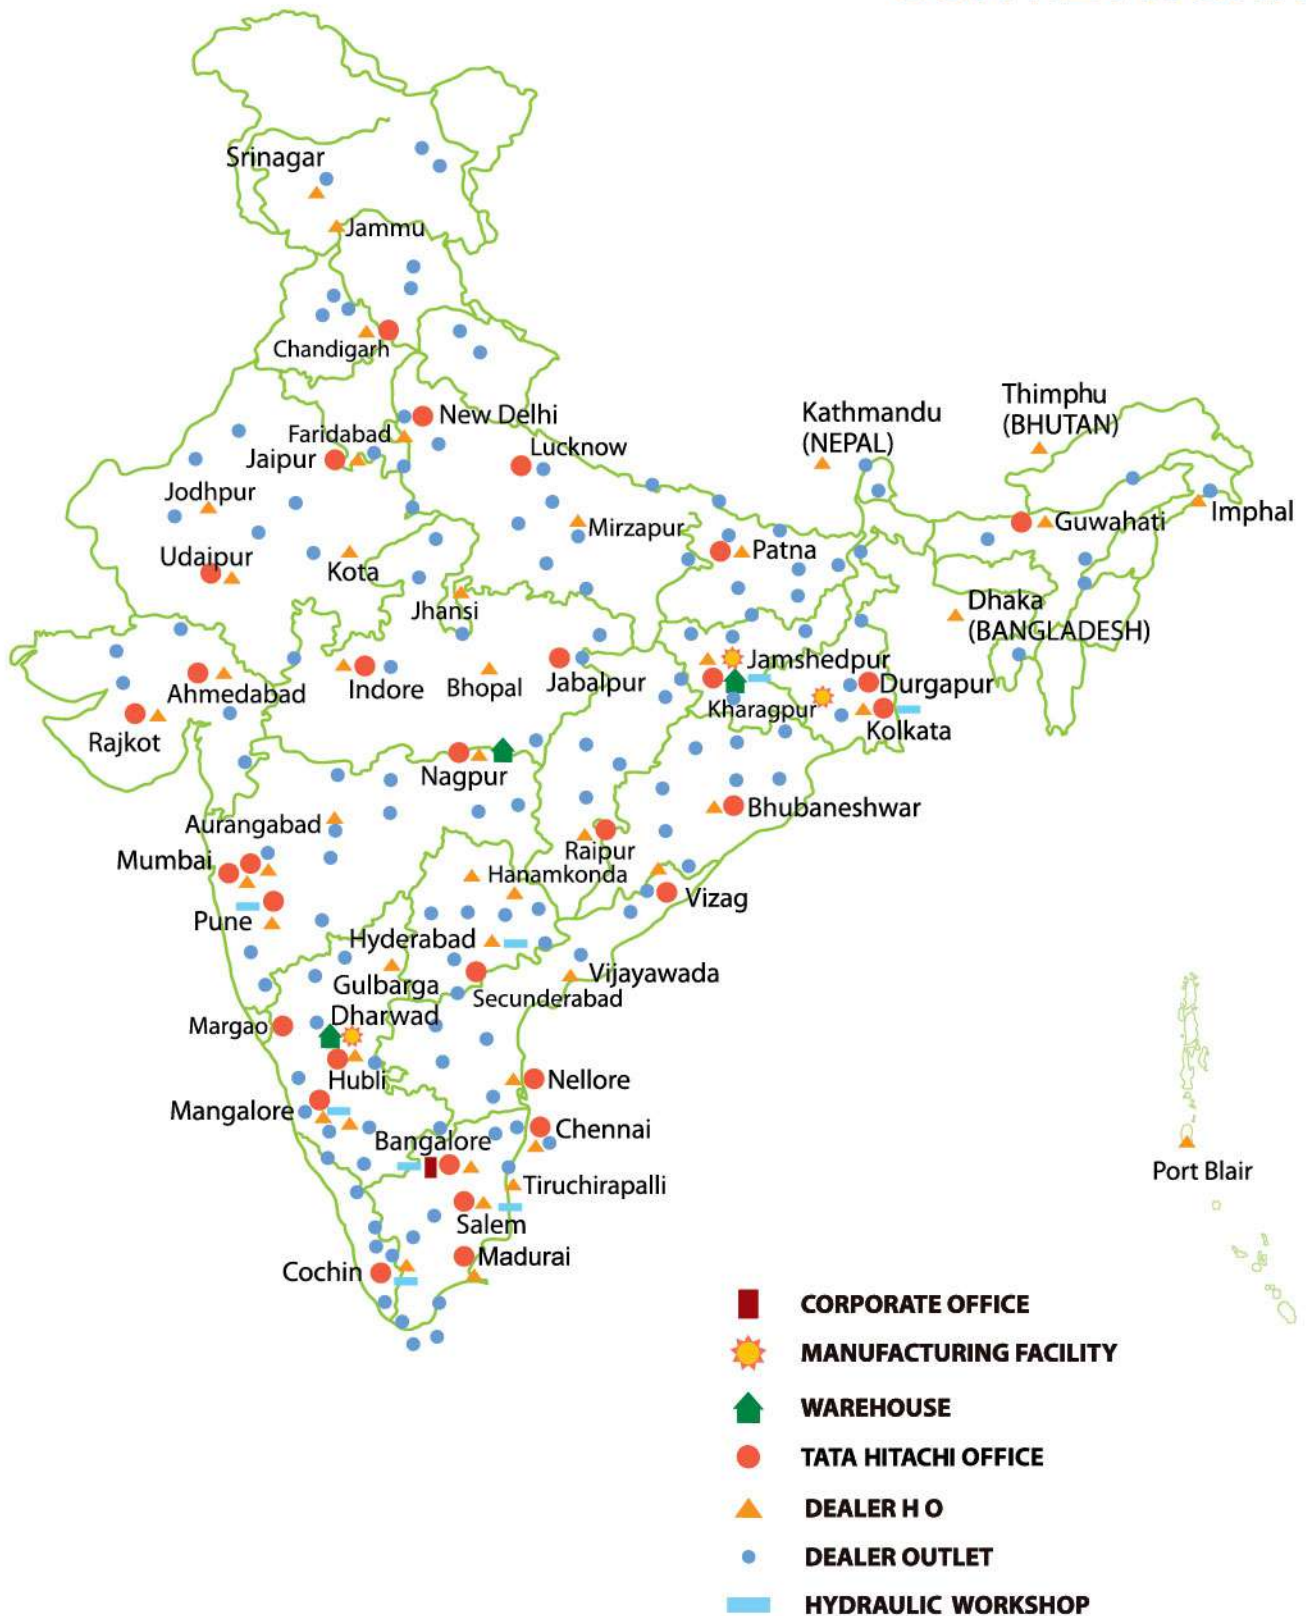

Tata Hitachi Construction Machinery Company Private Limited

Jubilee Building, 45 Museum Road, Bangalore - 560 025

Phone: 080-66953301-05 | Fax: 080-66953309 | Toll Free No. 1800 121 6633

Email: info@tatahitachi.co.in