



AUGER



Designed for precision and power, the Tata Hitachi Auger is the perfect attachment for efficient drilling in soil, clay, or other soft ground conditions. Ideal for applications like pole installation, fencing, and foundation work, it ensures faster, cleaner and more reliable drilling performance.

Features

- Manufactured from high grade materials & precision engineered products.
- Designed to withstand extreme working conditions.
- Unique Design of single piece drive shaft to prevent shaft dislodgement.
- Interchangeable wear parts & pilot extensions for improved flexibility and accuracy.
- Amplified torque & High efficiency due to planetary gearbox. Best in class warranty.



APPLICATION



ELECTRICAL POLE



PLANTATION,
FOUNDATION/CASING
INSTALLATION




SOLAR PANEL
INSTALLATION



DEWATERING
APPLICATION



LANDSCAPING,
FENCING,
BORING ETC.

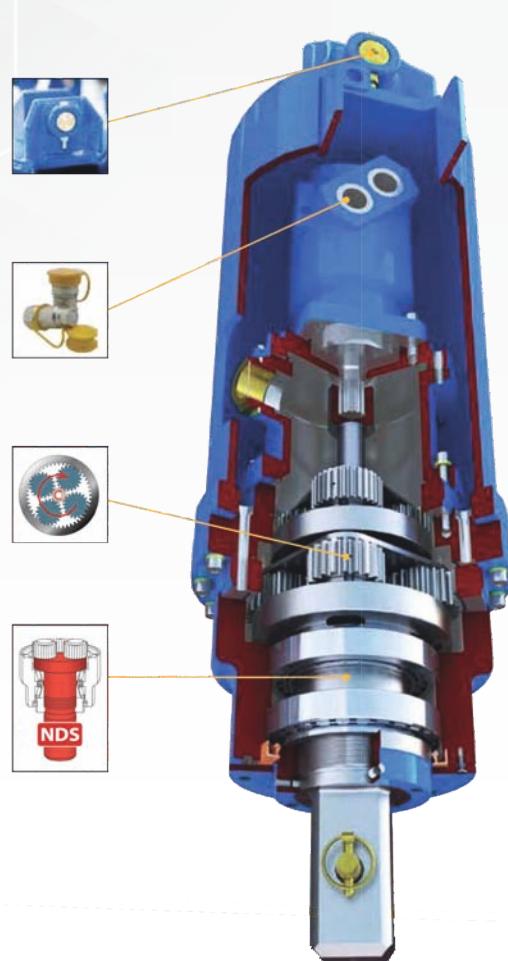

Description	Unit	8000 Max
Torque Range	Nm	2,717-8,152
Oil Pressure Range	Bar	80-240
Oil flow Range	Lpm	70-150
Unit Weight	Kg	116
Auger Diameter Range	mm	150-1.2
Auger Depth Range	M	2.4-6
Output Shaft Std.	mm	75
Suitable Machine Class	Ton	6-8

Tata Hitachi Construction Machinery Company Private Limited

Registered Office: Jubilee Building, 45 Museum Road, Bangalore, India 560025

Telephone: +91 80 6695 3301 / 02 / 03 / 04 / 05 | Toll Free : 1800 121 6633

Email: info@tatahitachi.co.in | Website: www.tatahitachi.co.in | [f](https://www.facebook.com/tatahitachi) [y](https://www.youtube.com/tatahitachi) [in](https://www.linkedin.com/company/tatahitachi) [i](https://www.instagram.com/tatahitachi/) [t](https://www.twitter.com/tatahitachi)

These specifications are subject to change without prior notice. The machine depicted may vary from the actual machine. Please contact our nearest office for latest specifications. Accessories shown here are not part of the standard equipment. Performance of the machine may vary with site and operating conditions encountered.

Authorised Dealership