

HYDRAULIC ELECTROMAGNETS




Hydraulic Electromagnet

Hydraulic Electromagnets convert the hydraulic power of the excavator to magnetic force. These magnets enable easy handling of metal scraps in different applications. Usage of the Quick Coupler makes the mounting and switching of the attachment easier and faster. These electromagnets contribute to increased productivity with minimal machine downtime and can work efficiently. Additionally, they do not require any modifications or maintenance.

Applications

- Metal scrap handling and separation in:
 - Scarp yards
 - Demolition site
 - Construction site
 - Recycling plant
- Railways / roadside cleaning
- Loading and unloading from trucks, trains etc.

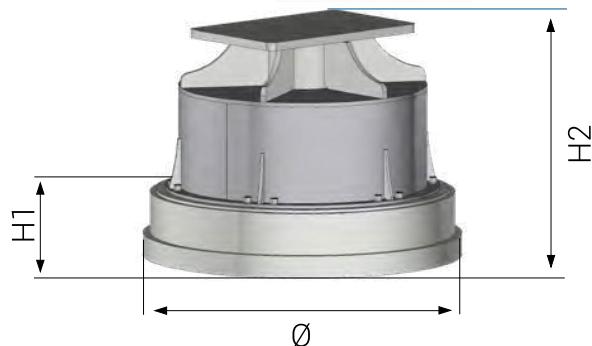

Specifications

	MODELS	75IP	85IP	96IP	105IP	114IP	126IP	150IP
	Machine weight (Ton) min-max	8-15	10-16	13-20	17-25	20-28	24-35	30-40
	Min. Flow (L/min)	50	50	60	70	80	100	120
	Max. Flow (L/min)	120	120	130	140	140	150	150
	Max. Pressure (Bar)	200	200	200	200	200	200	200
	Diameter (mm)	750	850	960	1050	1140	1260	1500
	H base (mm)	245	245	260	270	270	270	300
	H including chain/plate (mm)	750	750	750	800	800	800	830
	Power (kW)	2,6	3,4	4,5	5,5	6,0	7,5	12
	Weight (Kg)	680	820	940	1300	1400	1700	2650
	Voltage (V)	220	220	220	220	220	220	220

Tata Hitachi Construction Machinery Company Private Limited

Registered Office: Jubilee Building, 45 Museum Road, Bangalore, India 560025
Telephone: +91 80 66953301 / 02 / 03 / 04 / 05 | Email: info@tatahitachi.co.in

www.tatahitachi.co.in

Toll Free Number
1800 121 6633



EXTENDED WARRANTY
SUPPORT CENTER



CERTIFIED USED EQUIPMENT
TATA HITACHI PREMIUM USED VALUE

Authorised Dealership

These specifications are subject to change without prior notice. The machine depicted may vary from the actual machine. Please contact our nearest office for latest specifications. Accessories shown here are not part of the standard equipment. Performance of the machine may vary with site and operating conditions encountered.