

TRENCHER




TRENCHER

Introducing an exceptionally durable and reliable Trencher, a game-changer for trenching projects. This effortlessly cover depths from 0.6 m to 1.5 m while minimizing soil disruption. It offers an efficient and time-saving solution that reduces laborious tasks.

APPLICATIONS


- Electric Cable
- Fiber Optic Cable
- Gas / Water Piping
- Drainage & irrigation
- Hedge & Small Tree Planting
- Ground Heat Pump Systems

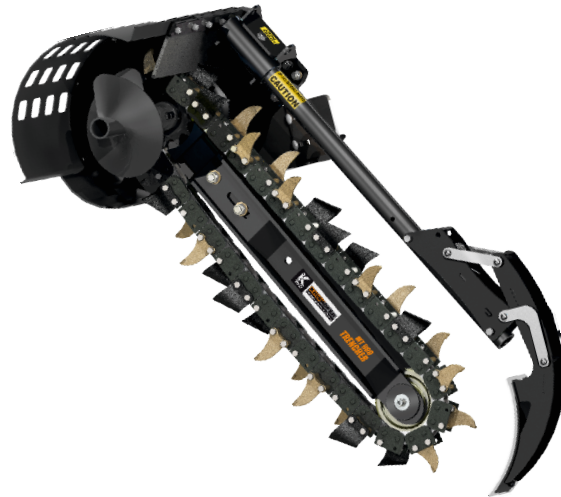

SPECIFICATIONS

Models	MT600	MT900	XHD 900	XHD 1200	XHD 1500
Excavator weight Class (T)	2.5-4.5	3.0-5.0	5.0-7.5	5.0-7.5	5.0-10.0
Oil Pressure Range (Bar)	160-240	180-240	180-240	180-240	180-240
Oil Flow Range (lpm)	35-65	45-80	60-95	70-115	81-135
Unit Width (mm)	850	850	1018	1018	1018
Unit Height (mm)	736	736	808	808	808
Unit Length (mm)	1465	1800	1962	2262	2562
Cutting Width Range (mm)	100-300	100-300	150-350	150-300	150-200

TRENCH DEPTH CAPABILITY

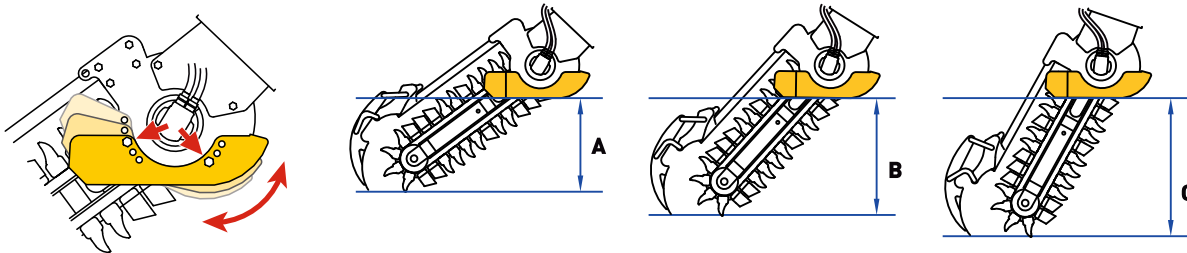

Models	Depth A	Depth B	Depth C
MT600	300mm	450mm	600mm
MT900	600mm	750mm	900mm
XHD 900	600mm	750mm	900mm
XHD 1200	800mm	1000mm	1200mm
XHD 1500	1000mm	1250mm	1500mm

Tata Hitachi Construction Machinery Company Private Limited

Registered Office: Jubilee Building, 45 Museum Road, Bangalore, India 560025
Telephone: +9180 66953301 / 02 / 03 / 04 / 05 | Email: info@tatahitachi.co.in



These specifications are subject to change without prior notice. The machine depicted may vary from the actual machine. Please contact our nearest office for latest specifications. Accessories shown here are not part of the standard equipment. Performance of the machine may vary with site and operating conditions encountered.

Authorised Dealer