

### **Telcon Rock Breaker**


Introducing the all new Telcon series of rock breakers. These rock breakers are durable, cost effective and can be used for different applications like primary & secondary breaking, scaling, demolition and tunnelling. Tata Hitachi's robust and wide support network ensures timely service and spare parts support, there by giving complete peace of mind to our customers.

# **Features**

- Air Check Valve
- Rigid Dampening System
- 2 Stroke Adjuster
- **BPM** Adjuster
- Anti Blank Firing

### **Optional Features**

- Under Water Kit
- **Auto Greasing**

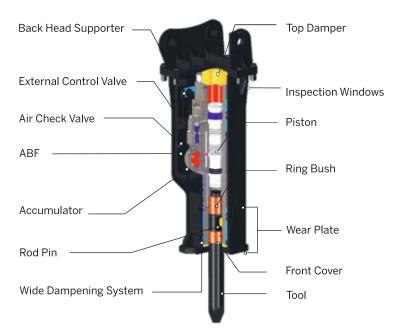

## **Specifications**

DESCRIPTION	MARKS
Excavator Weight Class	18-26 Ton
Operating Weight (*)	1725 Kg
Overall Length	2670 mm (Approx)
Chisel Diameter	135 mm
Chisel Length	1200 mm
Setting Pressure	210 bar
Operating Pressure	160-190 bar
Optimal Oil Flow	110-170 lpm
Impact Rate	350-550 bpm
Back Head Pressure	14-16 kg/cm²
Anti-Blank Firing	Yes
2-Stroke Control	Yes
Auto Greasing	Optional
Accumulator	Yes
Frame Bottom Plate Thickness	50mm



#### **Tata Hitachi Construction Machinery Company Private Limited**

Registered Office: Jubilee Building, 45 Museum Road, Bangalore, India 560025 Telephone: +91 80 6695 3301 / 02 / 03 / 04 / 05 | Toll Free: 1800 121 6633 Email: info@tatahitachi.co.in | Website: www.tatahitachi.co.in | 6 0 6 0

Authorised Dealership

These specifications are subject to change without prior notice. The machine depicted may vary from the actual machine. Please contact our nearest office for latest specifications. Accessories shown here are not part of the standard equipment Performance of the machine may vary with site and operating conditions encountered.