



TATA HITACHI

Reliable solutions

THE MINI MARVEL



TMX20 neo
Super
SERIES

SPECIFICATIONS

ENGINE

Make Yanmar
 Model 3TNV88-BSTAH
 Type 3 Cyl, Water Cooled, Diesel, DI
 Rated Flywheel Power 27.4 HP @ 2200 rpm
 Max. Torque 11 kgf-m @ 1320 rpm
 Battery 12 V

HYDRAULIC SYSTEM

Main Pumps One gear pump
 Flow Rate 63.6 lpm

SUPER STRUCTURE

Swing Speed 11 rpm
 Boom Swing Angle Left 50°, Right 90°

RELIEF VALVE SETTINGS

Implement Circuit 150 kgf/cm²
 Swing Circuit 145 kgf/cm²
 Travel Circuit 150 kgf/cm²
 Pilot Circuit 25 kgf/cm²

UNDERCARRIAGE

Shoe Width 280 mm
 No. of Track Shoes 36 x 2
 No. of Upper Rollers 1 x 2
 No. of Lower Rollers 3 x 2
 Travel Speed 0-1.64 3.27 km/h
 Gradeability 30° (58%)

SERVICE REFILL CAPACITIES

Hydraulic System 70 ltr
 Hydraulic Tank 45 ltr
 Fuel Tank 37 ltr, 56 ltr
 Engine Coolant 7.5 ltr
 Engine Oil 6.7 ltr
 Travel Device (Each Side) 0.8 ltr

WEIGHTS AND GROUND PRESSURE

Operating Weight 2300 kg
 Operating Weight With Optional Features 2800~2900 kg
 Ground Pressure 0.283 kg/cm²

BACKHOE ATTACHMENT

Boom 1900 mm
 Arm 1000 mm


BUCKETS

Capacity (PCSA)	Width with Side Cutters	Width w/o Side Cutters	Weight	No. of Tooth Points
0.04 m ³	350 mm	310 mm	42.5 kg	3
0.07 m ³	530 mm	490 mm	55 kg	4
0.077 m ³	590 mm	550 mm	59 kg	4

DIGGING FORCES

Arm Crowd Force 1300 kgf
 Bucket Digging Force 1890 kgf

DIMENSIONS

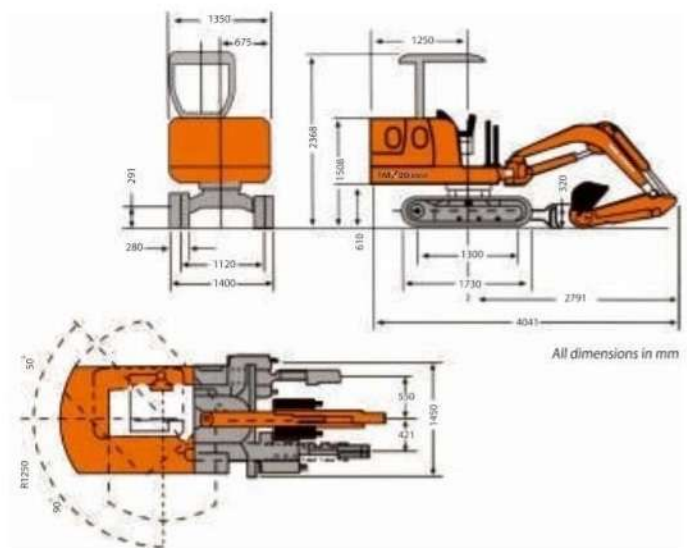

Tata Hitachi Construction Machinery Company Private Limited

Registered Office: Jubilee Building, 45 Museum Road, Bangalore, India 560025
 Telephone: +91 80 66953301 / 02 / 03 / 04 / 05 | Email: info@tatahitachi.co.in



www.tatahitachi.co.in

1800 121 6633

EXTENDED WARRANTY

CERTIFIED USED EQUIPMENT

VALUE

OUR RANGE OF PRODUCTS



Authorised Dealer

These specifications are subject to change without prior notice. The machine depicted may vary from the actual machine. Please contact our nearest office for latest specifications. Accessories shown here are not part of the standard equipment. Performance of the machine may vary with site and operating conditions encountered.